

CASTABLE LINING

CATALOGUE



TABLE OF CONTENTS

Single Layer Lining - Hand Welding

V Anchor	5
CH Range	8
UV Range	13
UBL Range	14



Multi Layer Lining

Twin Pin Range - Hand Welding	17
Twin Pin Range - Gun Welding	20
TW Range	21
Bullhorn Range	25


SINGLE LAYER LINING

HAND WELDING

V ANCHOR - HAND WELDING

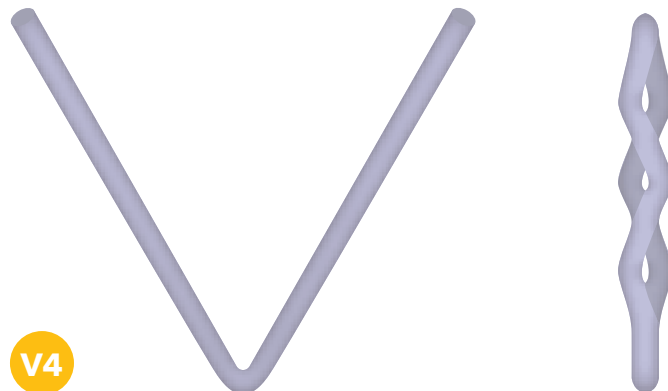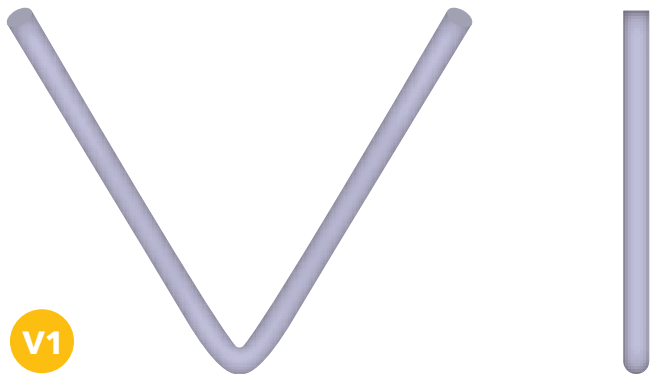

FOR HAND WELDING

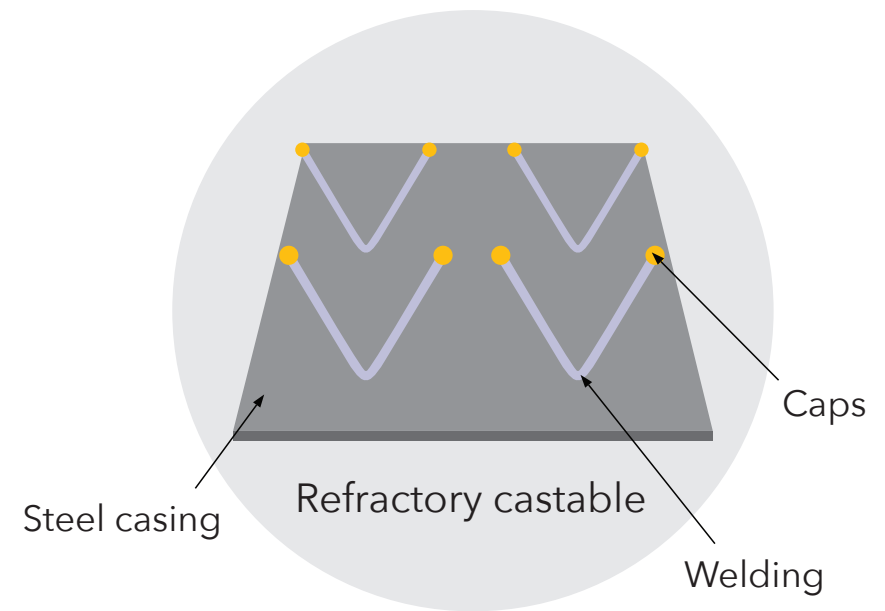

V ANCHOR - V1


DESIGNATION

V1.6(60) - 040 - 304


↑ ↑ ↑ ↑ ↑
Anchor type Angle Length L (L1/L2) Alloy
Diameter D

STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (a/b)
for unequal legs

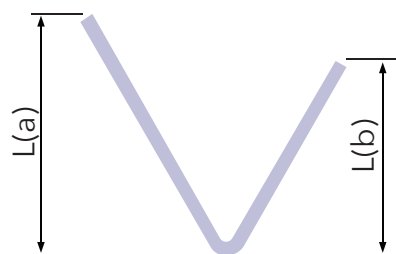

Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

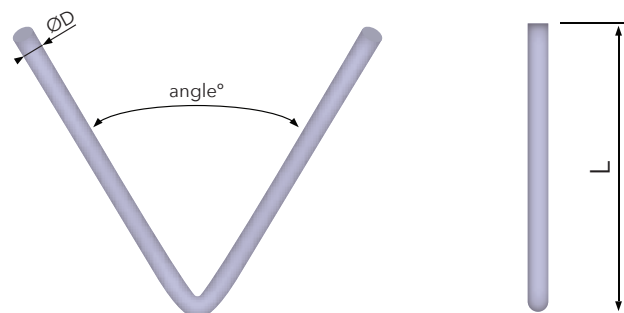

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310

ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310

↑ ↑ ↑ ↑ ↑
ANCHOR TYPE aD RADIUS R LENGTH L ALLOY

BSP : with a base plate

Alloy and length

IN.BSP.040.040.8(10) - 304



V ANCHOR - V4


DESIGNATION

V4.6(60) - 060 - 304


↑ ↑ ↑ ↑ ↑
Anchor type Angle Length L (L1/L2) Alloy
Diameter D

STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (L1/L2)
for unequal legs

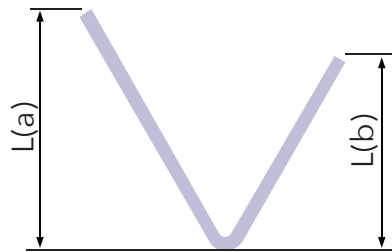

Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

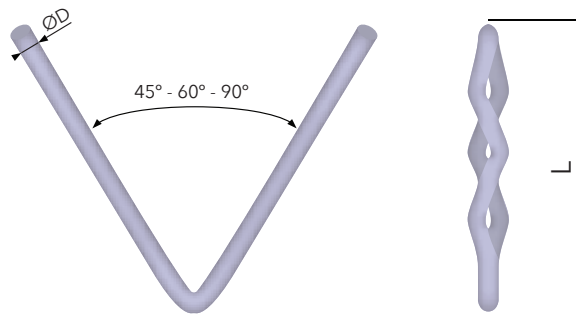

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310

ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310

↑ ↑ ↑ ↑ ↑
ANCHOR TYPE aD RADIUS R LENGTH L ALLOY

BSP : with a base plate





Alloy and length

IN.BSP.040.040.8(10) - 304



CH RANGE - HAND WELDING


FOR HAND WELDING

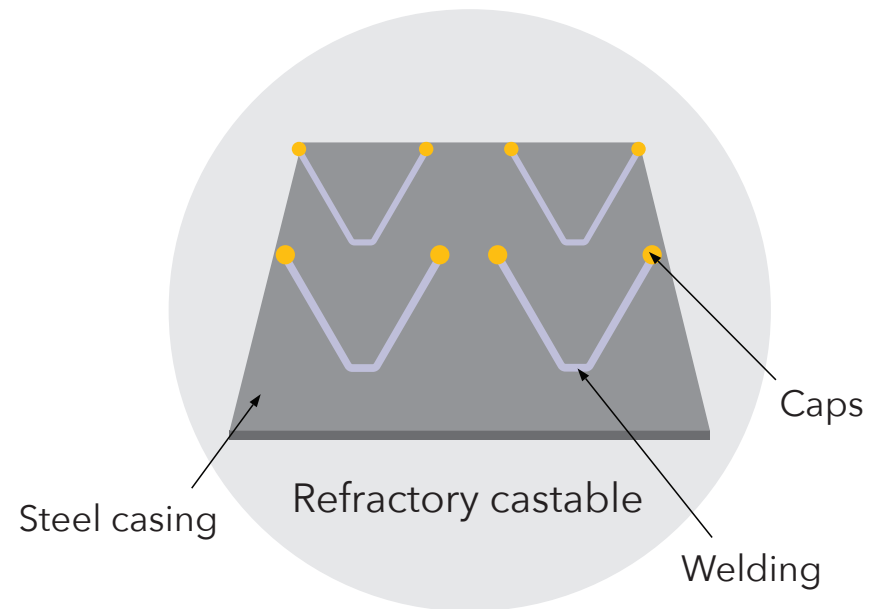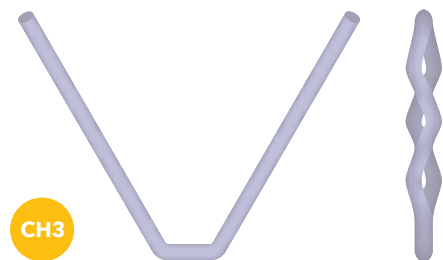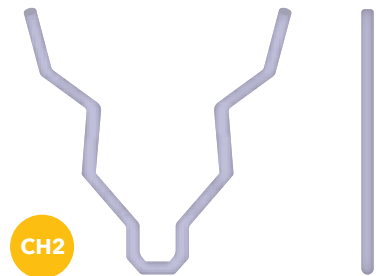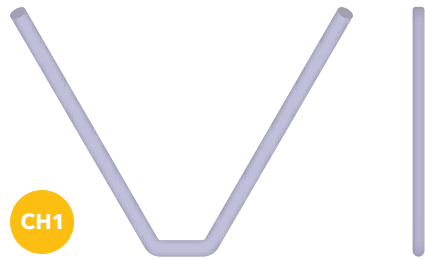

CH RANGE - CH1


DESIGNATION

CH1.6 (60) - 035 - 304




STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (L1/L2)
for unequal legs



Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

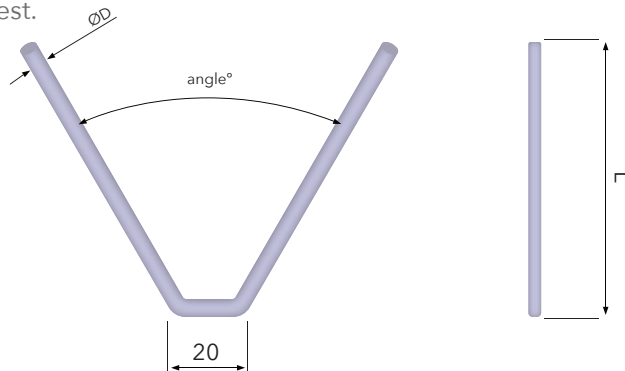

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310


ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310



BSP : with a base plate

Alloy and length


IN.BSP.040.040.8(10) - 304



CH RANGE - CH1.RL


DESIGNATION

CH1.RL.4(60) - 025 - 050 - 020 - 304

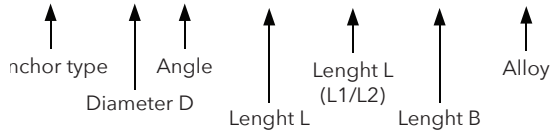


STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (a/b)
for unequal legs



Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

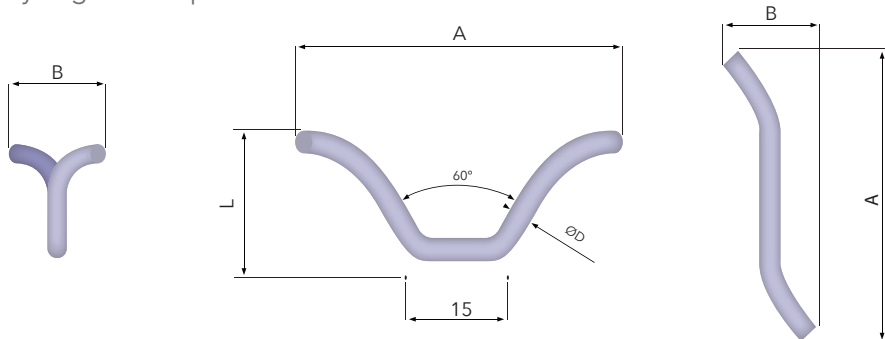

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310


ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310



BSP : with a base plate

Alloy and length

IN.BSP.040.040.8(10) - 304



CH RANGE - CH2


DESIGNATION

CH2.8(60) - 130 - 304


↑ ↑ ↑ ↑
 Anchor type Angle Length L (L1/L2) Alloy
 Diameter D

STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (L1/L2)
for unequal legs



Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

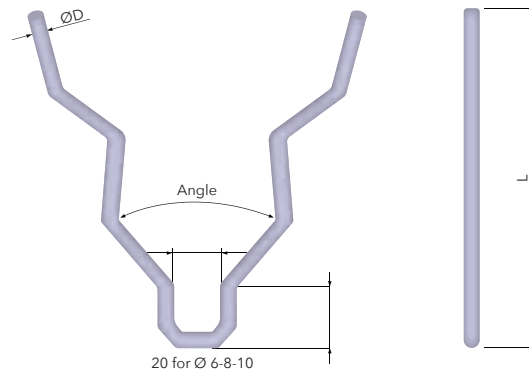

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310

ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310

↑ ↑ ↑ ↑ ↑
 ANCHOR TYPE aD RADIUS R LENGTH L ALLOY

BSP : with a base plate

Alloy and length

IN.BSP.040.040.8(10) - 304



CH RANGE - CH4


DESIGNATION

CH4.6(60) - 150 - 253


↑ ↑ ↑ ↑ ↑
 Anchor type Angle Length L (L1/L2) Alloy
 Diameter D

STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (a/b)
for unequal legs



Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.

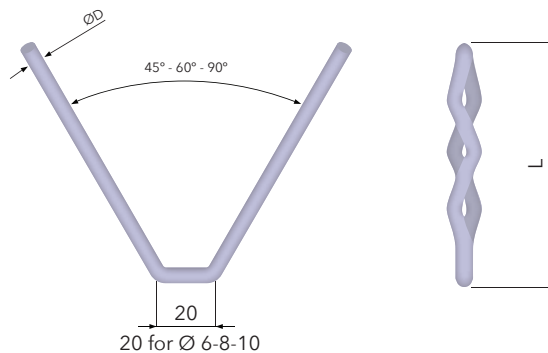

20 for Ø 6-8-10

OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310

ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310

↑ ↑ ↑ ↑ ↑
 ANCHOR TYPE aD RADIUS R LENGTH L ALLOY

BSP : with a base plate

Alloy and length

IN.BSP.040.040.8(10) - 304



UV RANGE - UV

DESIGNATION


CH2.8(60) - 130 - 304

↑ ↑ ↑ ↑ ↑





Anchor type Angle Length L (L1/L2) Alloy

STANDARD OPTIONS

Option CAPS
Caps on top



Option LENGTH (L1/L2)
for unequal legs

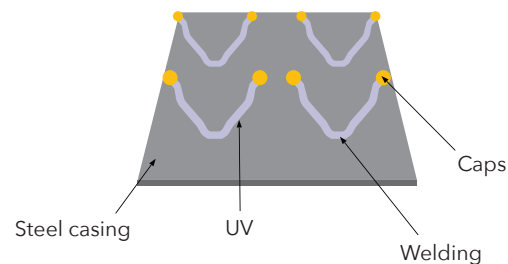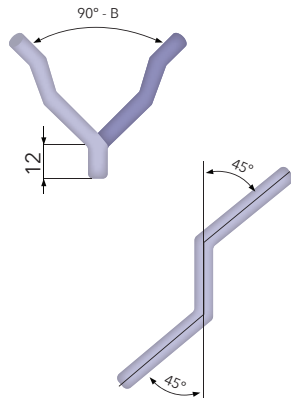


OPTION


BL: Bent Legs
With the top of legs bent
ANCHOR NAME _ BL + LENGTH

OS : on stud
Welded on threaded stud
standard stud :
M8 - 310
ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss
Welded on boss
Standard boss :
M8_AISI 310
ANCHOR NAME _ OB + SIZE + ALLOY



ON : on nut
Standard nut :
M8_AISI 310
ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310

↑ ↑ ↑ ↑ ↑

ANCHOR TYPE aD RADIUS R LENGTH L ALLOY


BSP : with a base plate
Alloy and length
IN.BSP.040.040.8(10) - 304



UBL RANGE - UBL

DESIGNATION


U.BL.6(90/90) - 55(25) - 310

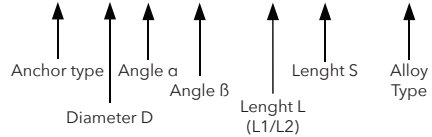

STANDARD OPTIONS


Option CAPS

Caps on top






Option LENGTH (a/b)

for unequal legs



Notes:

Most frequent angles: 45° - 60° - 90°
any angle on request.



OPTION

BL: Bent Legs

With the top of legs bent

ANCHOR NAME _ BL + LENGTH

OS : on stud

Welded on threaded stud

standard stud :

M8 - 310

ANCHOR NAME _ OS + SIZE + ALLOY


OB : on boss

Welded on boss

Standard boss :

M8_AISI 310

ANCHOR NAME _ OB + SIZE + ALLOY




ON : on nut


Standard nut :

M8_AISI 310


ANCHOR NAME _ ON + SIZE + ALLOY



WB : with an omega




WB . 8 . R12 / 25 . 310



BSP : with a base plate

Alloy and length



IN.BSP.040.040.8(10) - 304



MULTIPLE LAYER LINING

HAND WELDING

TWIN PIN - HAND WELDING

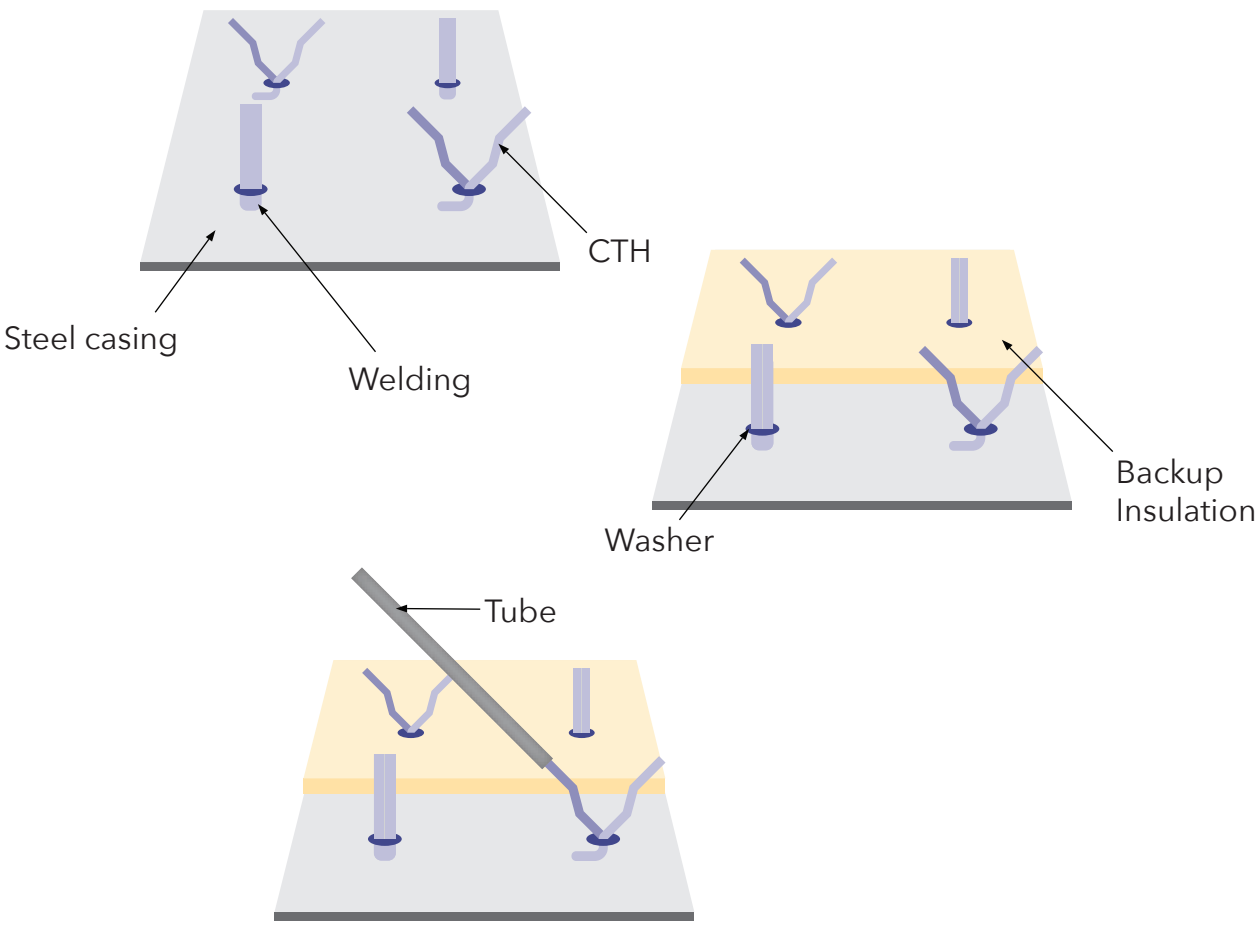
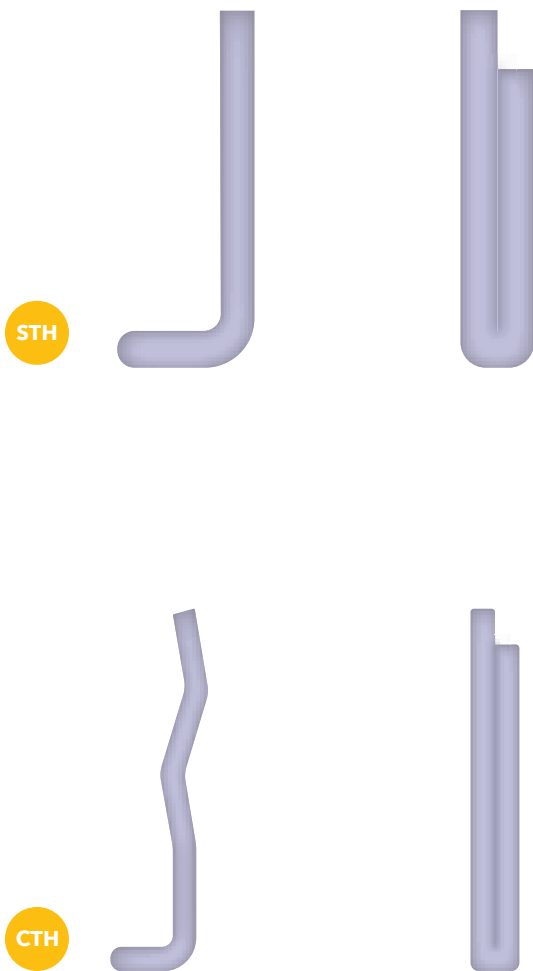


TWIN PIN - STH

DESIGNATION


STH.6 - 060/055 - 25 - 310

↑ ↑ ↑ ↑ ↑ ↑
 Diameter D Lenght L1 Lenght R Alloy
 Anchor type Lenght L2

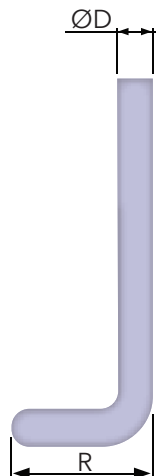
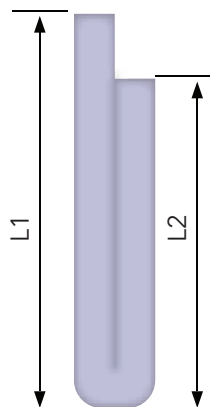


STANDARD OPTIONS

Option CAPS
Caps on top



Option LENGTH (a/b)
for unequal legs

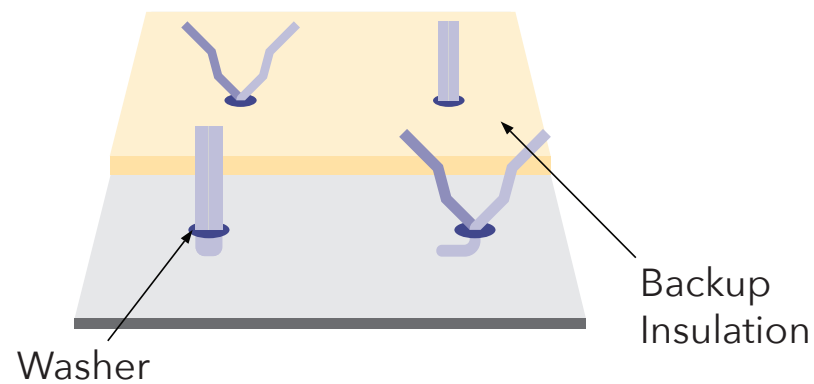



TWIN PIN - CTH

DESIGNATION

CTH.6 - 200/190(50) - 25 - 304


↑ ↑ ↑ ↑ ↑ ↑
 Anchor type Lenght L1 Lenght L2 Step S Length R Alloy

Diameter D Lenght L2 Length R

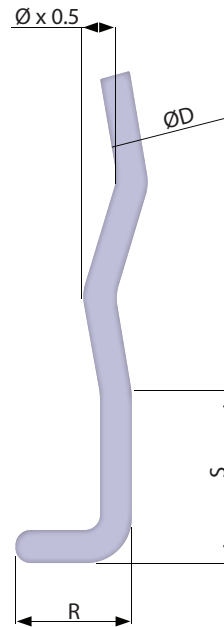
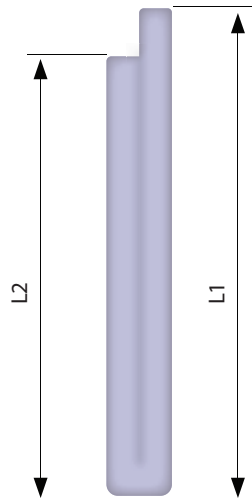


STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (a/b)
for unequal legs

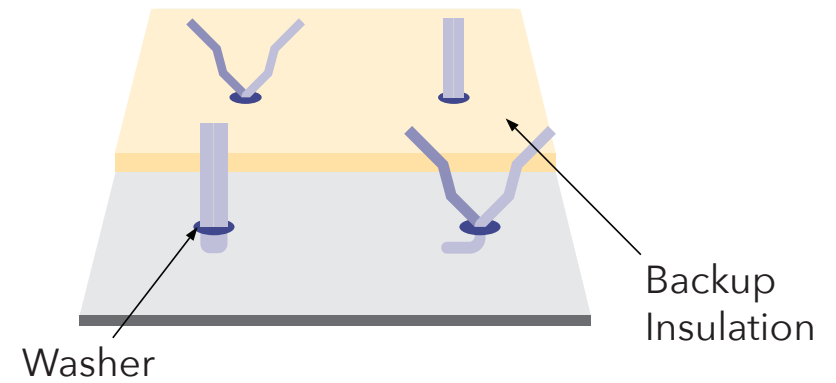



TWIN PIN - GUN WELDING






STH



CTH

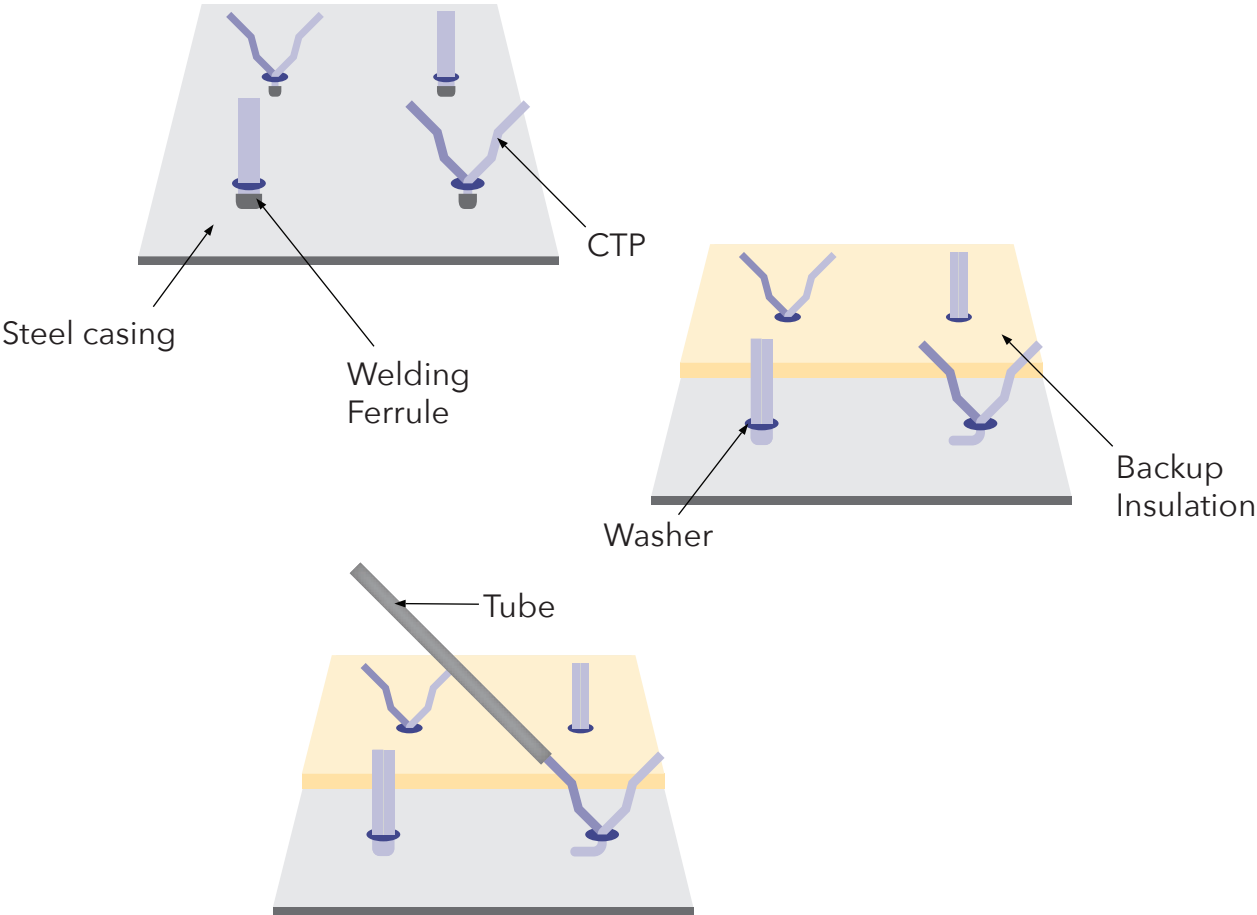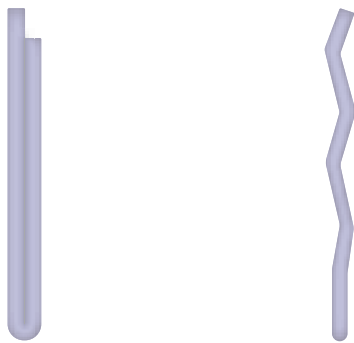




TW RANGE - HAND WELDING

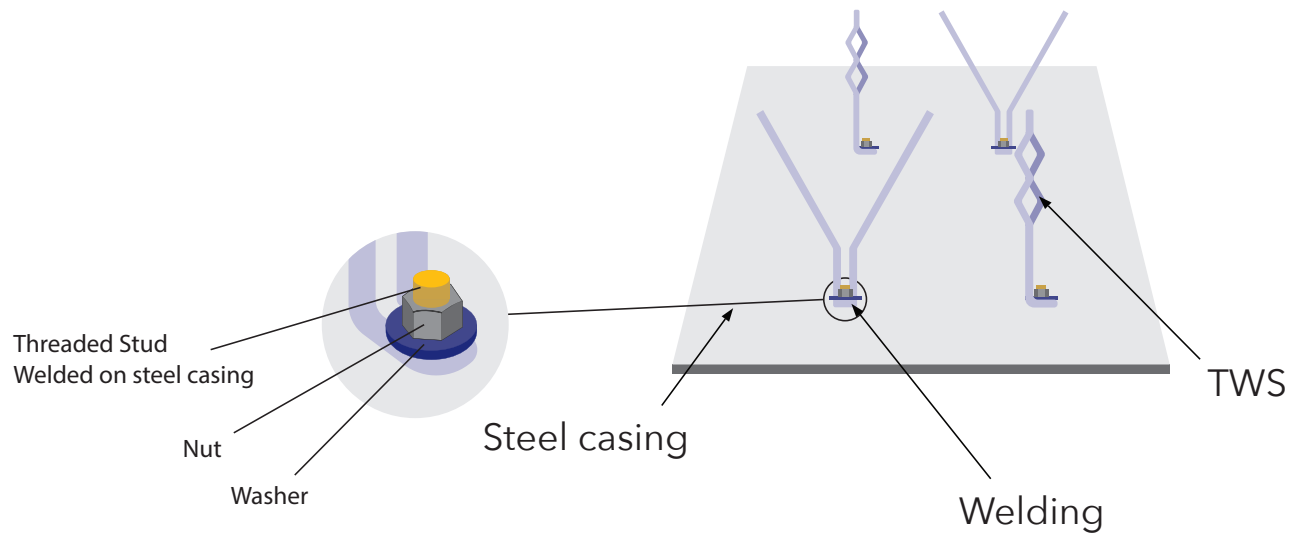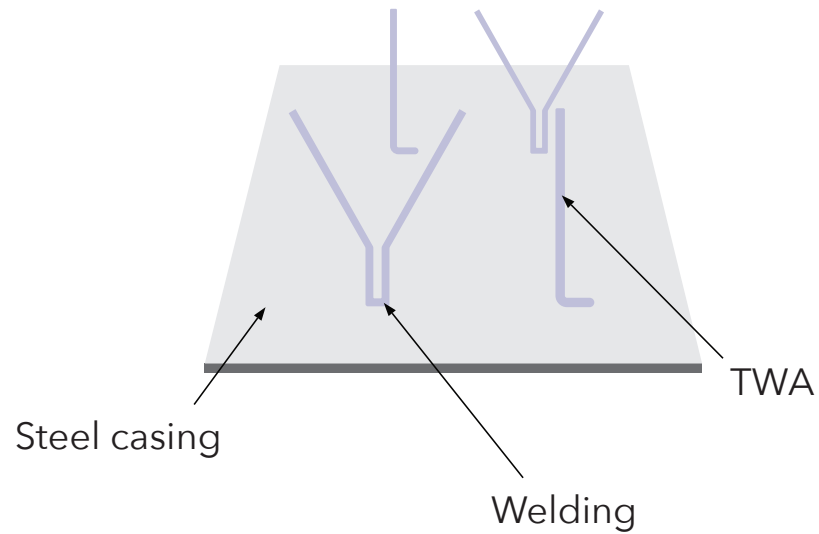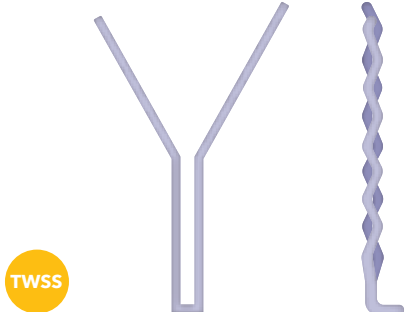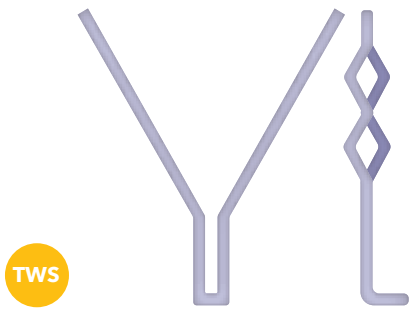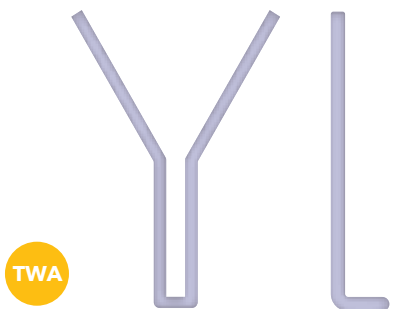

TW RANGE - TWA

DESIGNATION


TWA.8 (60) - 200(100) - 25 - 310

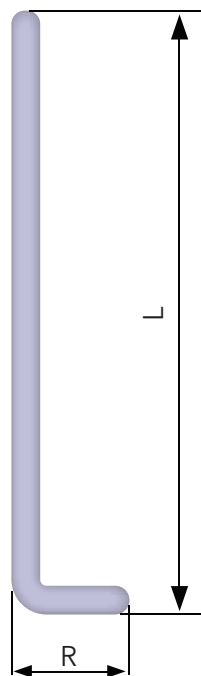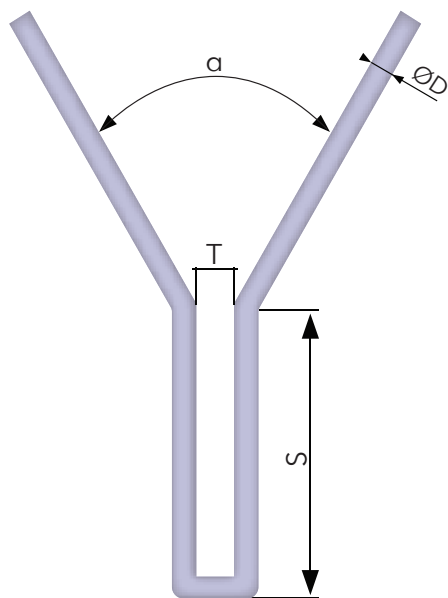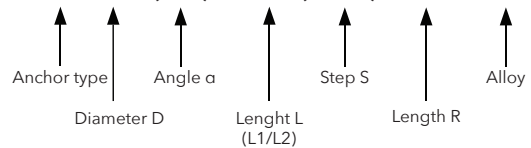

STANDARD OPTIONS



Option CAPS

Caps on top



Option LENGTH (a/b)

for unequal legs

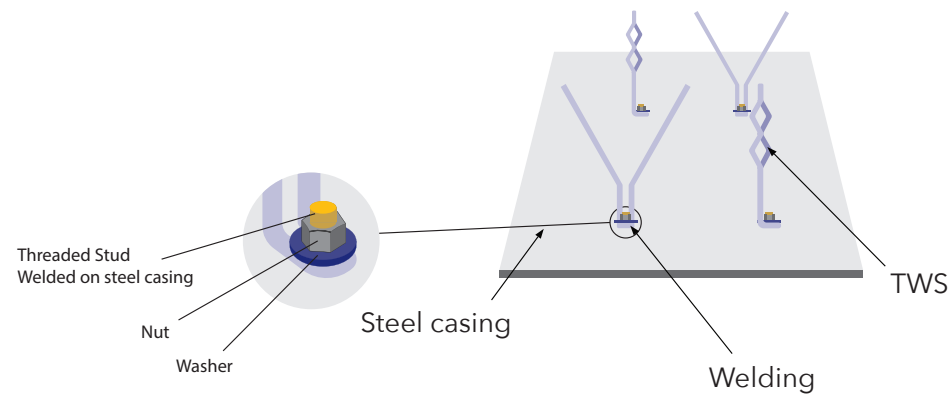



TW RANGE - TWS

DESIGNATION

TWS.8 (60) - 200(100) - 25 - 310


↑ ↑ ↑ ↑ ↑ ↑
 Anchor type Diameter D Angle α Length L (1/1/2) Step S Length R Alloy

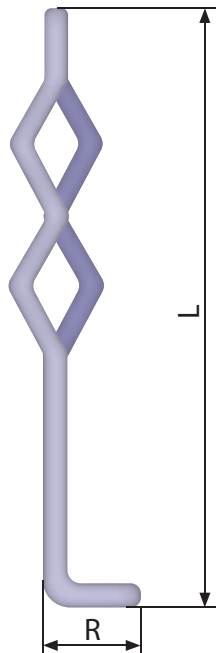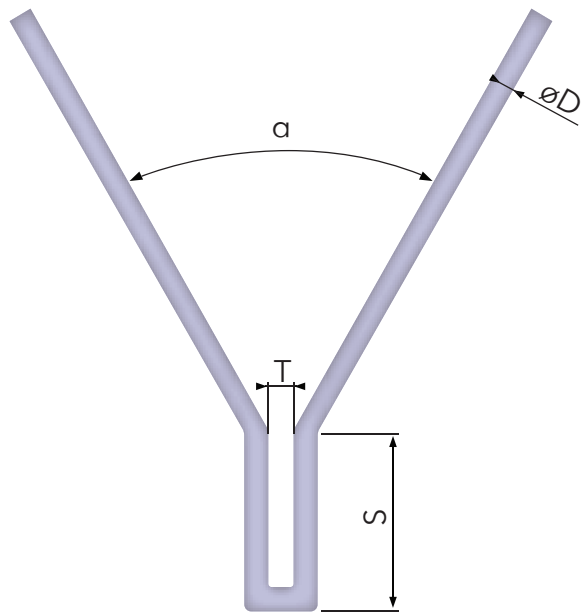

STANDARD OPTIONS



Option CAPS

Caps on top



Option LENGTH (a/b)



for unequal legs

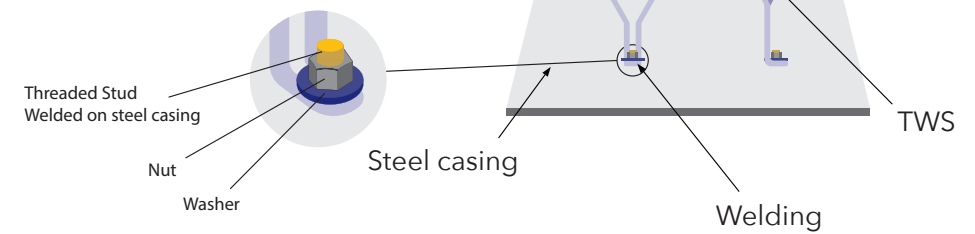

TW RANGE - TWSS

DESIGNATION


TWSS.8 - 275/265 (125 - 50) - 25 - 253

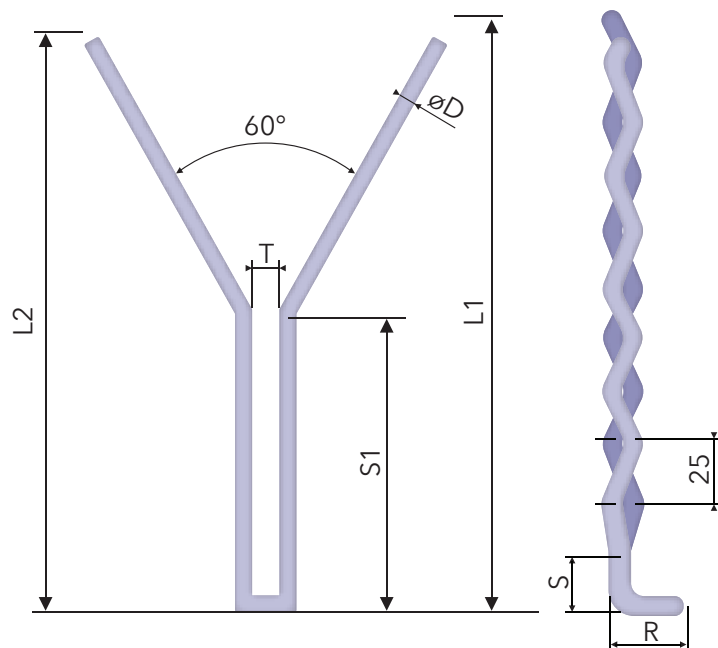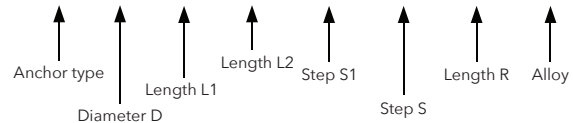

STANDARD OPTIONS



Option CAPS

Caps on top




Option LENGTH (a/b)

for unequal legs


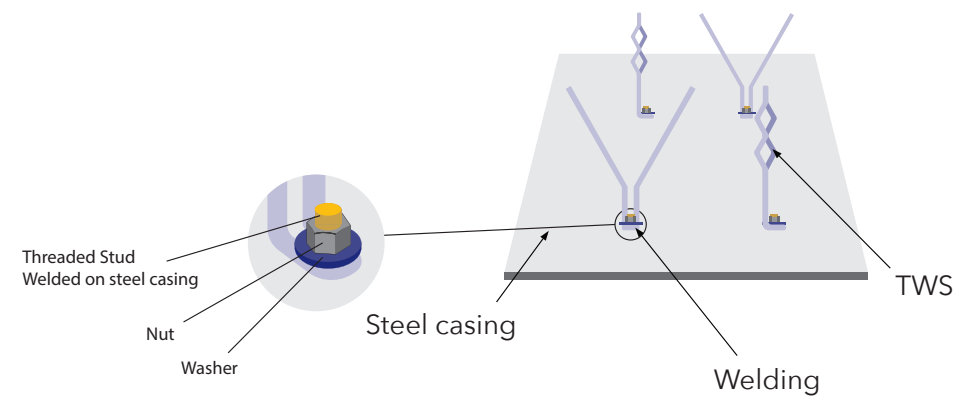



BULLHORN RANGE - HAND WELDING

CBH

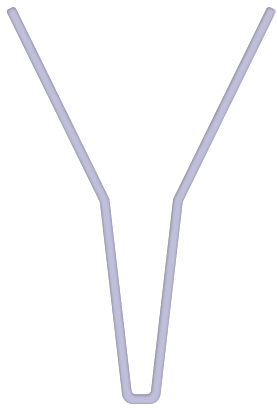

CBH

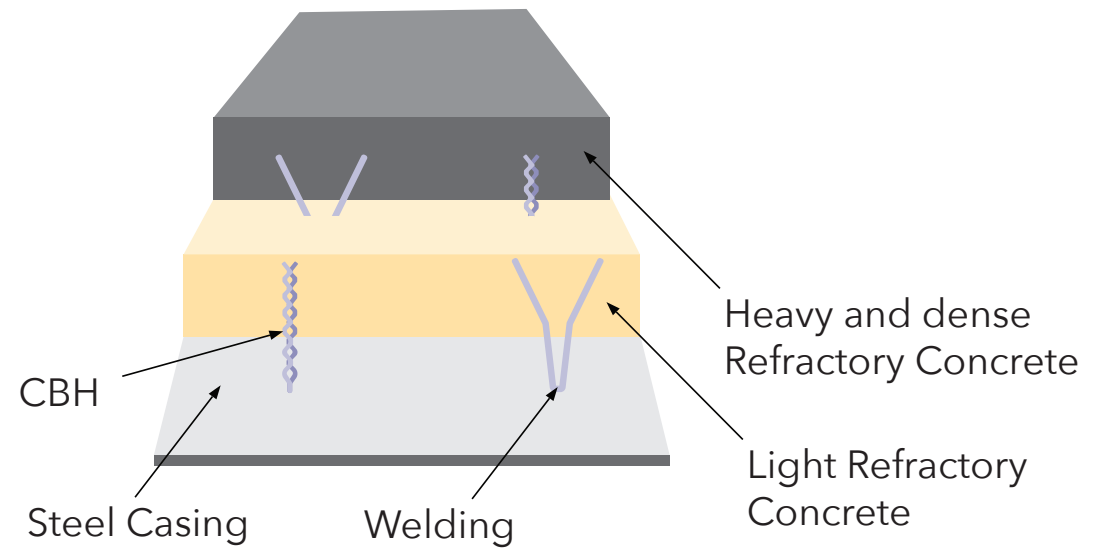
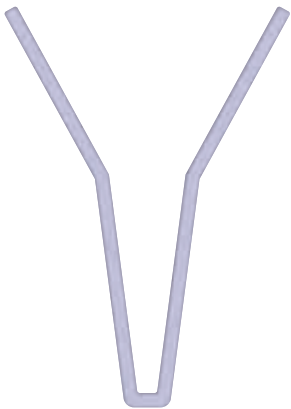


BULLHORN RANGE - CBH

DESIGNATION


CBH.8. (15/60) - 250 - 253

↑ ↑ ↑ ↑ ↑
Anchor type Diameter D Angle α Angle β Length L (L1/L2) Alloy

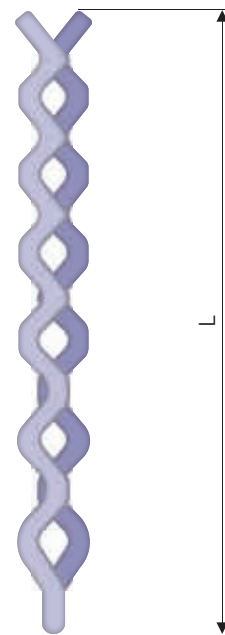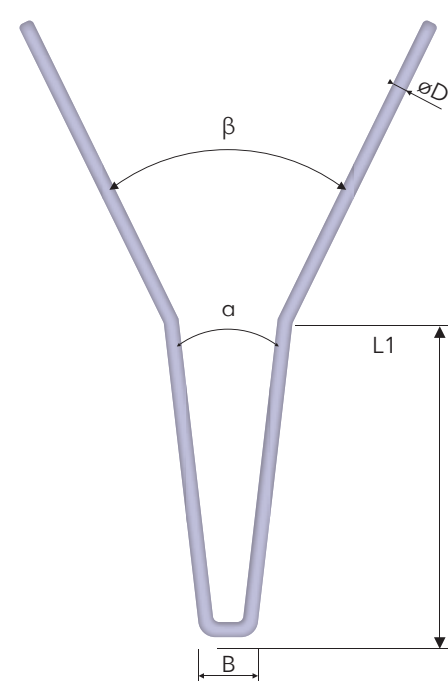


STANDARD OPTIONS

Option CAPS
Caps on top




Option LENGTH (a/b)
for unequal legs



BL: Bent Legs
With the top of legs bent
ANCHOR NAME _ BL + LENGTH




ON : on nut
Standard nut :
M8_AISI 310
ANCHOR NAME _ ON + SIZE + ALLOY



BULLHORN RANGE - CBH.SG

DESIGNATION


CBH.SG.8 (15/55) - 350 - 30 - 330

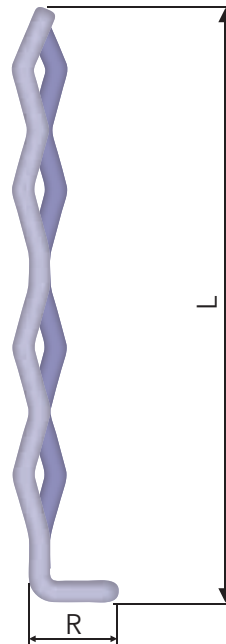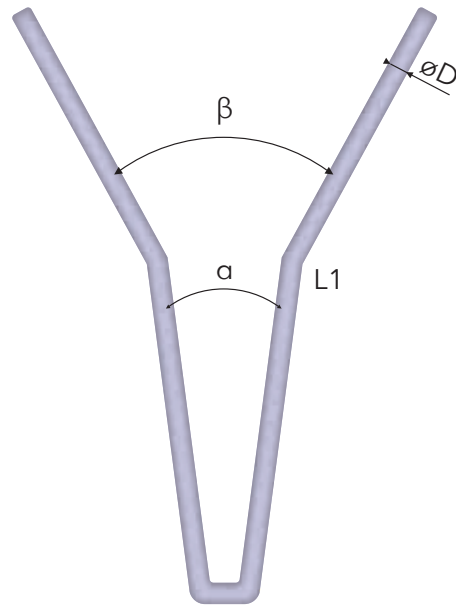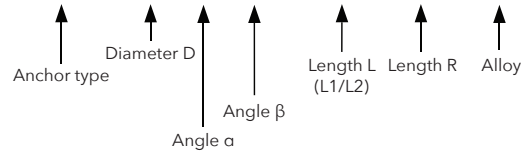

STANDARD OPTIONS


Option CAPS

Caps on top



Option LENGTH (a/b)

for unequal legs



BL: Bent Legs
With the top of legs bent
ANCHOR NAME _ BL + LENGTH

